



ANT-2400-H
MMDS Slot Omnidirectional Antenna
Horizontal Polarization

Technical Specification
V3.01

Chengdu Tengyue Electronics Co., LTD.

Add: 518 5F, E-trade Building, 126 Yihuan Road East 2nd Section, Chengdu City, 610052, China

TEL: 86 (28) 84303287

FAX: 86 (28) 84310769

Whatsapp: +8613980034578

E-Mail: catherine@rfty.com

Skype: tye.catherine

WEB: <http://www.rfty.com>


Overview



Features

- Frequency Range:2400-2483MHz
- Special customized frequency by operator's detail requirements.
- Optional gain customized by operator's detail requirements.
- High Gain and long range coverage.

Polarization Radiation Diagram

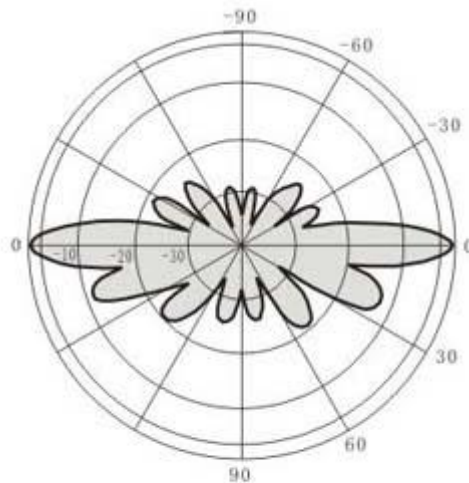

垂直面方向图
Vertical Plane

Technical Specifications

Model	TY-7316(H)
Frequency Range	2400-2483GHz
Bandwidth	83(MHz)
Input Impedance	50(Ω)
VSWR	<1.5
Gain	6dBi
(3dB) HPBW	4°E-plane
F/B Ratio	>12(dB)
Maximum Power	10(W)
Connector Type	N-K
Polarization	Horizontal Polarization
Lighting Protection	Direct Ground
Working temperature	-40°C~60°C
Wind Velocity	200(km/h)
Length	1600(mm)
Weight	7(Kg)